

Air Conditioning
Cooling



Heating
Ventilation

HVAC air curtains

Type InduAir

HVAC® Air curtains

The Energy Saving air curtain for Industrial Applications

InduAir



The solid, self-supporting housing of the energy saving air curtain InduAir, which has been developed for the industrial application, is manufactured from powder coated galvanized sheet steel or aluminium and can be mounted beside or above the plant gate.

Standard finishing RAL 9002 (grey white).

The InduAir blow out Jet-Flo is made of anodized aluminium finishing in device colour. A stainless steel design is also available on request.

Backside bent high performance radial fans suck up the air via a powder coated galvanized sheet steel intake louver with optimum cross-section and an inflow jet from one side.

The blow out is accomplished with the HVAC aerodynamic Jet-Flo high-pressure chamber system with a nearly non-dissipative adjustment range of the blow angle (40°) and allows highest shielding performance with up to 40% less energy expenditure than traditional industrial air curtain systems.

The single-surved anti-vibration radial fans that are supplied with alternating current (230V, 1Ph, 50Hz, IP44) are silent in the operation and provide the power-specific airflows. Airflow regulation via five-stage touch button control, safety class IP 23.

Advantages of the InduAir:



- Aerodynamic Jet-Flo high-pressure chamber system
- Compact design
- Optimum working shield
- Lower noise level
- Lower energy consumption
- Can be horizontally and vertically used
- Easy to mounted
- Low investment
- Rapid amortization
- Significant energy saving

HVAC aerodynamic Jet-Flo air curtain technology

HVAC developed a new air curtain generation, using the “Jet-Flo tubes”, which have inside aerodynamically shaped and adjustable wings: leaving the tube, the air becomes an extra concentrated and condensed airflow like air below an airplane - wing, resulting in following unique characteristics:

- 40% less energy consumption compared to any other air curtain
- The only air curtain worldwide fully shielding an open entrance gap
- The only air curtain worldwide for heights up to 6 meter or any width
- Double adjustable; air velocity and blow out direction
- Much less air volume needed, resulting in a very silent operation
- No insects can pass through due to the concentrated air stream
- Architecture variety possible thanks to the compact Jet-Flo tube
- The tube is accurately to direct to building over-or under pressure
- The air stream can be adjusted towards winter- or summer mode
- Investment is earned back in < 2 years by the very high efficiency
- Noise level is upon the very lowest in the market ($\leq 46 - 71$ dB(A))

These unique characteristics make implementation of Jet-Flo air curtains possible in situations & business sectors, where this is hardly possible with air curtains, using conventional air-outlets:

- All industrial environments in general (shielding the internal air)
- Food industry (shielding entrances of cool- & deep freeze stores)
- Shielding neighbors against smell from garbage treatment plants
- Preventing smell to penetrate from one to next production process
- Creating strong “air locks” at entrances in heavy circumstances
- Shielding entrances at direct strong & cold sea winds (up to Bf 6!)
- Compensating losses & draft (up to 20%) of revolving doors
- Compensating losses & draft (up to 50%!) of sliders at vestibules
- Decrease CO2 emission

Our advice

Explain us your specific problem and we will investigate which Jet-Flo air curtain configuration is the ultimate solution!



Infrared photographs


The infrared photographs show the temperature separation between the inner and outer environment. The Jet-Flo high-pressure chamber discharge system will create an optimal separation.

Normal View




Infrared views


Closed door

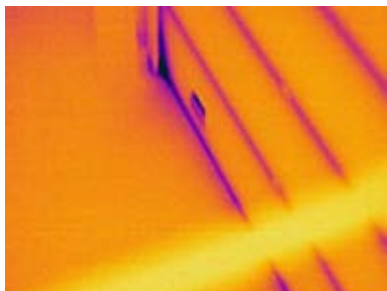

Open door without air curtain

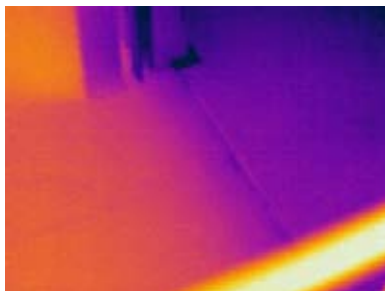

Open door with air curtain

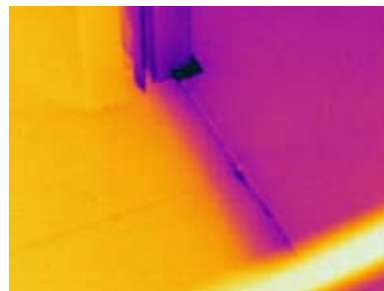


Normal View




Infrared views


Upper part



Middle part



Lower part





www.hvac.nl

HVAC Nederland

Postbus 2
1970 AA IJmuiden

T (0255) 52 24 20
F (0255) 51 42 96

info@hvac.nl
www.hvac.nl

